




◆ 选型 Type Selection

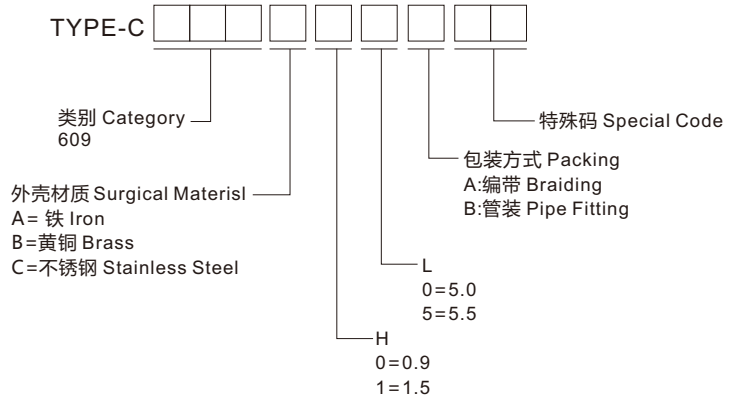

◆ 规格 Specifications


- 插入力 Insertion Force : 0.5 ~ 2.0kgf
- 脱模力 Removal Force : 0.8 ~ 2.0kgf
- 耐用性 Durability : 10000次循环 10000Cycles
- 额定电流 Current Rating : 3.0A
- 额定电压 Voltage Rating : 5.0V
- 绝缘电阻 Insulation Resistance : 100MΩ min
- 介电电压 AC Dielectric withstanding voltage, AC : 100V/minute
- 工作温度 Operating Temperature : -30°C ~ +80°C
- 板上的最高温度在 260°C 下保持 10 秒钟
 The peak temperature on the board shall be maintained for 10 seconds at 260°C

◆ 材质 Material






- 端子 Terminal : 铜合金 Copper Alloy
- 本体 Ontology : LCP UL94V-0

◆ 图表 Diagram

■ TYPE-C 609C

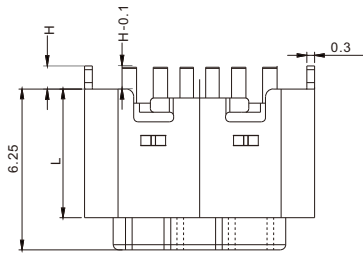

H	H=0.9	L	L=5.5
H	H=1.5	L	L=5.0

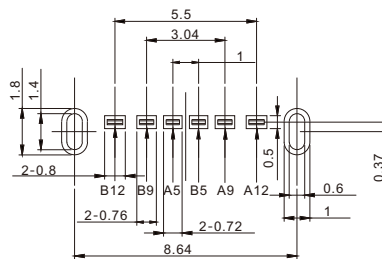

RECOMMENDED P.C.B LAYOUT
 TOLERANCE UNSPECIFIED ±0.05mm