


## ◆ 选型 Type Selection

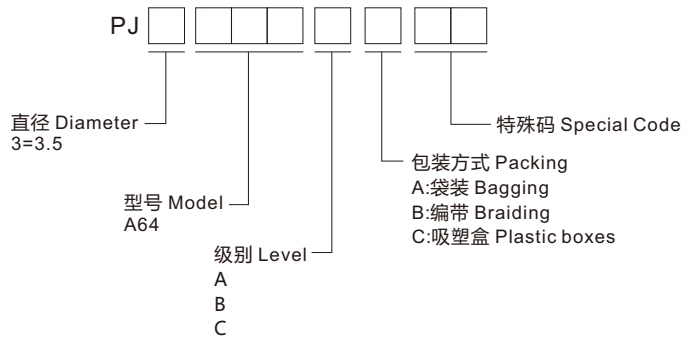

## ◆ 规格 Specifications

- 接点额定值 Contact Rating : 0.5A 30V DC
- 接触电阻 Contact Resistance :  $\leq 100\text{m}\Omega$
- 绝缘电阻 Insulation Resistance :  $\geq 100\text{M}\Omega$ .500V DC
- 介电 Dielectric :  $\geq 500\text{V AC/1 minute}$
- 插拔力 Insertion and Extraction Force : 3 ~ 20N
- 电气寿命 Electric Life :  $\geq 5000\text{cycles}$
- 工作温度 Operating Temp :  $-20^\circ\text{C} \sim +70^\circ\text{C}$
- 储存温度 Storage Temp :  $-30^\circ\text{C} \sim +70^\circ\text{C}$

## ◆ 材质 Material

- 端子 Terminal : 铜合金 Copper Alloy
- 外壳 Housing : PPA/PA6T

## ◆ 图表 Diagram

### ■ PJ3A64

