




## ◆ 选型 Type Selection

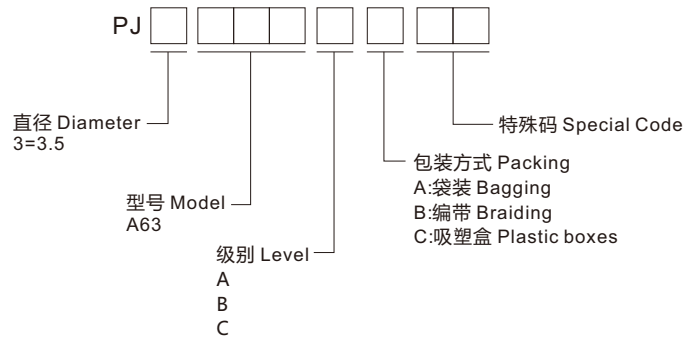

## ◆ 规格 Specifications



- 接点额定值 Contact Rating : 0.5A 30V DC
- 接触电阻 Contact Resistance :  $\leq 100m\Omega$
- 绝缘电阻 Insulation Resistance :  $\geq 100M\Omega$  500V DC
- 介电 Dielectric :  $\geq 500V$  AC/1 minute
- 插拔力 Insertion and Extraction Force : 3 ~ 20N
- 电气寿命 Electric Life :  $\geq 5000$  cycles
- 工作温度 Operating Temp :  $-20^{\circ}C \sim +70^{\circ}C$
- 储存温度 Storage Temp :  $-30^{\circ}C \sim +70^{\circ}C$

## ◆ 材质 Material

- 端子 Terminal : 铜合金 Copper Alloy
- 外壳 Housing : PPA/PA6T

## ◆ 图表 Diagram

### ■ PJ3A63

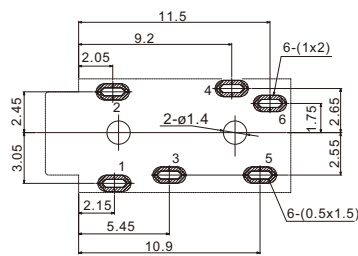

电路图  
Circuit diagram

