




## ◆ 选型 Type Selection

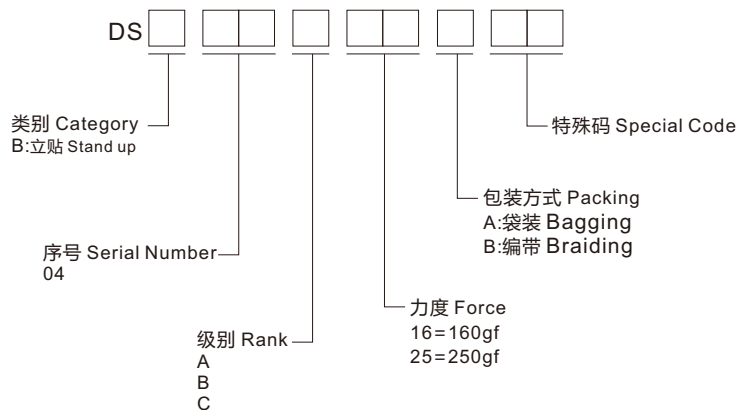

## ◆ 规格 Specifications




- 触点额定值 Contact Rating : 10mA 5V DC
- 接触电阻 Contact Resistance :  $\leq 3\Omega$
- 绝缘电阻 Insulation Resistance :  $\geq 100M\Omega$ .100V DC
- 介电 Dielectric :  $\geq 100V$  AC/1 minute
- 电气寿命 Electric Life :  $\geq 50000$ cycles
- 工作温度 Operating Temp :  $-20^{\circ}C \sim +70^{\circ}C$
- 储存温度 Storage Temp :  $-40^{\circ}C \sim +85^{\circ}C$

## ◆ 材质 Material



- 触点 Contacts : 铜合金 Copper Alloy
- 本体 Ontology : LCP UL94V-0
- 外壳 Housing : 不锈钢 Stainless Steel
- 按钮 Button : PPA

## ◆ 图表 Diagram

### ■ DSB04

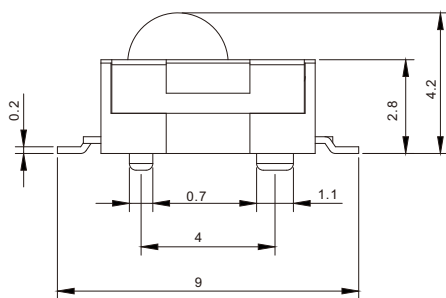

电路图  
Circuit diagram

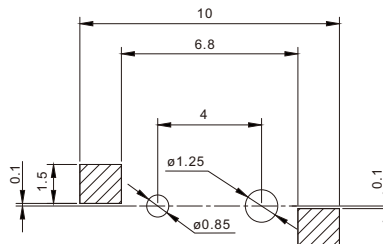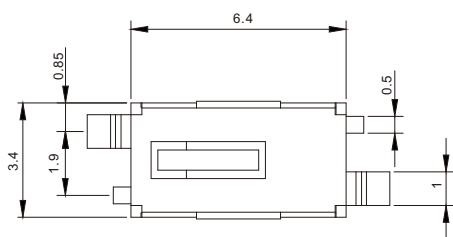

安装图  
instructions