

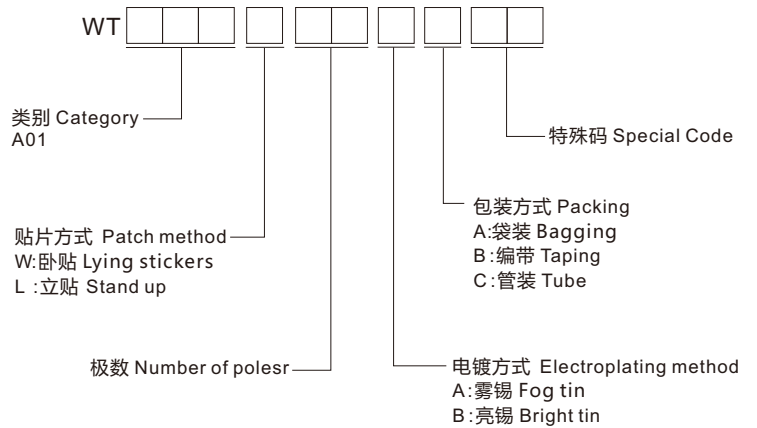



## ◆ 选型 Type Selection



## ◆ 图表 Diagram

■ 0.8



## ◆ 规格 Specifications


- 极数 Number of polesr : 2~20
- 工作温度 Working Temperature : -40°C~+85°C
- 额定电压 (最大) Voltage rating(max) : 1250V,AC
- 接触电阻 Contact resistance :  $\leq 0.02\Omega$
- 绝缘电阻 Insulation resistance :  $\geq 100M\Omega$
- 目前评级 Current rating : 1.0A
- 耐压 Withstand voltage : 250VAC(rms)

## ◆ 材质 Material

- 端子 Terminal: 铜合金 Copper Alloy
- 外壳 Housing: LCP/6T


CKT	尺寸 Size(mm)		
	A	B	C
2P	0.8	1.3	3.3
3P	1.6	2.3	4.3
4P	2.4	3.3	5.3
5P	3.2	4.3	6.3
6P	4.0	5.3	7.2
7P	4.8	6.3	8.3
8P	5.6	7.3	9.3
	.....	.....	.....

■ 立式 Vertical

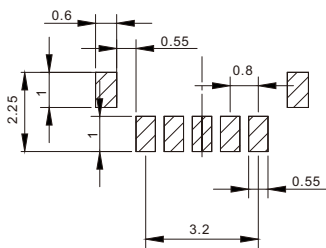

焊接图  
Welding diagram

■ 卧式 Recumbent

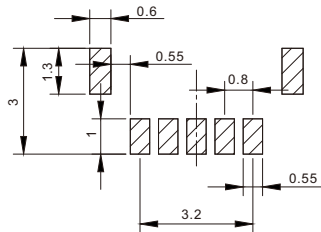

焊接图  
Welding diagram