

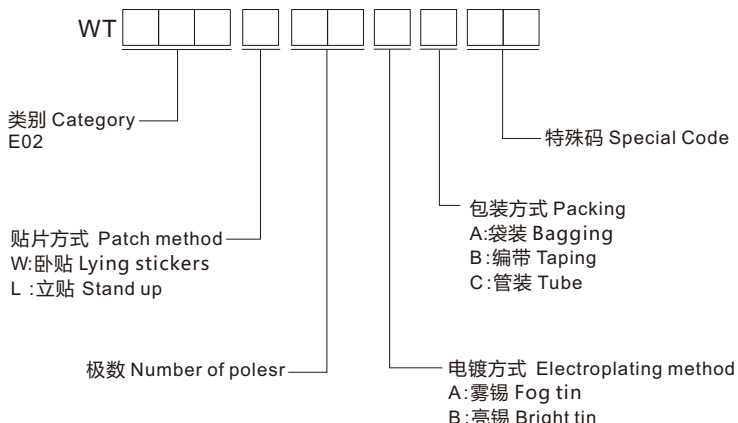
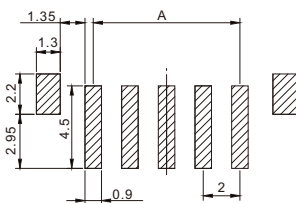



◆ 选型 Type Selection







◆ 图表 Diagram

■ HY-2.0立贴 Stand up



焊接图
Welding diagram

■ HY-2.0卧贴 Lying stickers

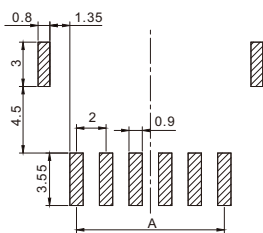

焊接图
Welding diagram

◆ 规格 Specifications

- 极数 Number of poles: 2~20
- 工作温度 Working Temperature: -40°C~+85°C
- 额定电压 (最大) Voltage rating(max): 1250V,AC
- 接触电阻 Contact resistance: $\leq 0.02\Omega$
- 绝缘电阻 Insulation resistance: $\geq 100M\Omega$
- 目前评级 Current rating: 1.0A
- 耐压 Withstand voltage: 250VAC(rms)

◆ 材质 Material

- 端子 Terminal: 铜合金 Copper Alloy
- 外壳 Housing: LCP/PPA

■ HY-2.0立贴 Stand up

CKT	尺寸 Size(mm)			
	A	B	C	D
2P	2.0	4.7	6.0	8.0
3P	4.0	6.7	8.0	10.0
4P	6.0	8.7	10.0	12.0
5P	8.0	10.7	12.0	14.0
6P	10.0	12.7	14.0	16.0
7P	12.0	14.7	16.0	18.0
8P	14.0	16.7	18.0	20.0

■ HY-2.0卧贴 Lying stickers

CKT	尺寸 Size(mm)			
	A	B	C	D
2P	2.0	4.7	6.0	8.0
3P	4.0	6.7	8.0	10.0
4P	6.0	8.7	10.0	12.0
5P	8.0	10.7	12.0	14.0
6P	10.0	12.7	14.0	16.0
7P	12.0	14.7	16.0	18.0
8P	14.0	16.7	18.0	20.0
