



## ◆ 选型 Type Selection

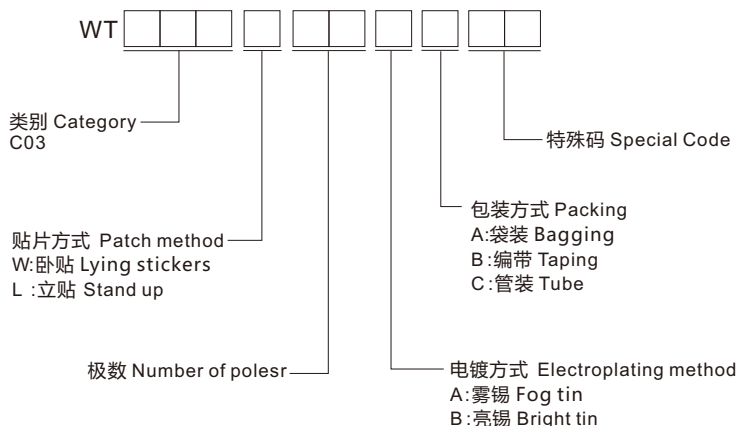

## ◆ 图表 Diagram

### ■ 超薄1.25卧贴 Lying stickers

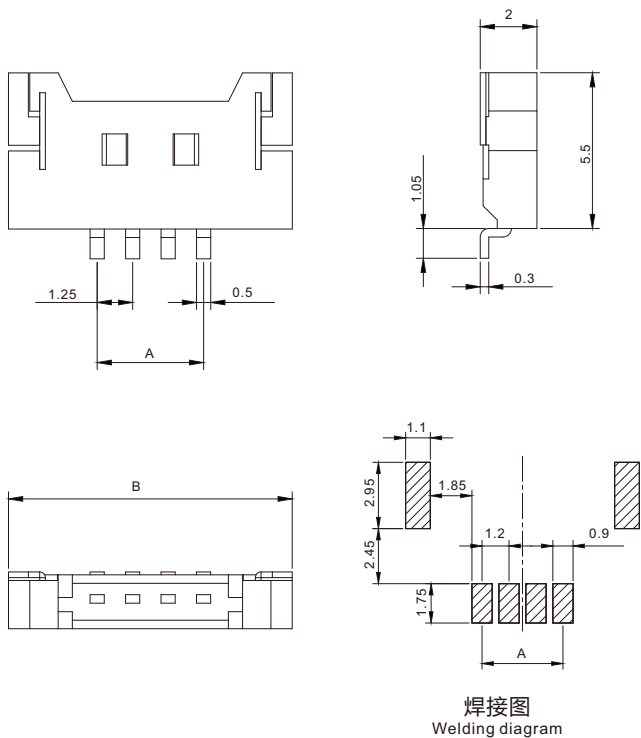

## ◆ 规格 Specifications

- 极数 Number of poles: 2~20
- 工作温度 Working Temperature: -40°C~+85°C
- 额定电压 (最大) Voltage rating(max): 1250V, AC
- 接触电阻 Contact resistance:  $\leq 0.02\Omega$
- 绝缘电阻 Insulation resistance:  $\geq 100M\Omega$
- 目前评级 Current rating: 1.0A
- 耐压 Withstand voltage: 250VAC(rms)

## ◆ 材质 Material

- 端子 Terminal: 铜合金 Copper Alloy
- 外壳 Housing: 尼龙 Nylon/6T

### ■ 超薄1.25卧贴 Lying stickers

CKT	尺寸 Size(mm)	
	A	B
2P	1.25	7.6
3P	2.50	8.8
4P	3.75	10.0
5P	4.00	11.2
6P	5.25	12.4
7P	6.5	13.6
8P	7.75	14.8
	.....	.....